


**FRAME & BRACE
SCAFFOLDING**

FRAMES



UTILITY FRAMES

DESCRIPTION	PART NO.	WT/LBS	STUD CNTR
UTILITY FRAME 2'H X 5'W	1042	24.00	1'
UTILITY FRAME 3'H X 5'W	1023	27.00	2'
UTILITY FRAME 4'H X 5'W	1024	34.00	3'
UTILITY FRAME 5'H X 5'W	1025	37.00	4'
UTILITY FRAME 6'4"H X 5'W	1026	43.00	4'
UTILITY FRAME 2'H X 42"W	1087	19.51	1'
UTILITY FRAME 3'H X 42"W	1088	23.05	2'
UTILITY FRAME 4'H X 42"W	1089	28.29	3'
UTILITY FRAME 5'H X 42"W	1090	32.02	4'



THRU FRAMES

DESCRIPTION	PART NO.	WT/LBS	STUD CNTR
THRU FRAME 6'4"H X 3'W	1033	40.00	4'
THRU FRAME 6'4"H X 5'W	1036	48.00	4'
THRU FRAME 6'4"H X 42"W	1082	42.00	4'
SIDEWALK CANOPY FRAME 7'8"H X 6'W	1040	70.00	2 X 3'
SIDEWALK CANOPY FRAME 7'8"H X 7'W	1041	81.00	2 X 3'



UTILITY NARROW FRAMES

DESCRIPTION	PART NO.	WT/LBS	STUD CNTR
NARROW FRAME 3'H X 2'W	1083	18.00	2'
NARROW FRAME 4'H X 2'W	1084	21.00	3'
NARROW FRAME 5'H X 2'W	1085	25.00	4'
NARROW FRAME 6'4"H X 2'W	1086	33.00	4'

BASES



SCREW JACKS & BASE PLATES

DESCRIPTION	PART NO.	WT/LBS
LEVELING JACK W/SOCKET	1317	14.50
LEVELING JACK W/BASE PLATE	5520	13.00
BASE PLATE (FIXED)	1301	3.00
SWIVEL BASE PLATE (MAX ANGLE 180°)	1302	5.00
SCREW JACK 24"	4505	12.50

NOTE: FOR USE OVER 12" ADJUSTMENT, CONTACT BETCO SCAFFOLDS ENGINEERING DEPARTMENT.

WARNING: DO NOT USE THESE JACKS WITH HEAVY DUTY SHORING.



OUTRIGGERS

DESCRIPTION	PART NO.	WT/LBS
OUTRIGGER LEG (4 REQUIRED PER TOWER)	1232	20.00

BRACKETS & BRACING


SIDE BRACKETS

DESCRIPTION	PART NO.	WT/LBS
SIDE BRACKET 20" – 2 BOARD	1420	7.50
SIDE BRACKET 30" – 3 BOARD	1430	20.00



END BRACKETS

DESCRIPTION	PART NO.	WT/LBS
END BRACKET 20" – 2 BOARD	1415	8.00
END BRACKET 30" – 3 BOARD	1425	17.50



CROSS BRACES



DESCRIPTION	PART NO.	WT/LBS
CROSS BRACE 5' X 1'	1151	7.90
CROSS BRACE 5' X 2'	1152	8.30
CROSS BRACE 5' X 3'	1153	9.50
CROSS BRACE 5' X 4'	1154	10.00
CROSS BRACE 7' X 1'	1171	10.70
CROSS BRACE 7' X 2'	1172	11.30
CROSS BRACE 7' X 3'	1173	11.80
CROSS BRACE 7' X 4'	1174	12.30
CROSS BRACE 10' X 2'	1102	16.30
CROSS BRACE 10' X 3'	1103	15.80
CROSS BRACE 10' X 4'	1104	16.50



GUARD RAILS & GATES

GUARD RAIL SYSTEMS

DESCRIPTION	PART NO.	WT/LBS
GUARD RAIL LINE POST 1.89" – FEMALE	1501	6.40
GUARD RAIL CORNER POST 1.89" – FEMALE	1502	6.60
SIDE GUARD RAIL PANEL 10' FOR THRU FRAME	1508	20.00
END GUARD RAIL PANEL FOR 42"W THRU FRAME	1511	4.32
SIDE GUARD RAIL PANEL 7' FOR THRU FRAME	1513	12.80
SIDE BRACKET GUARD RAIL PANEL FOR 20" SIDE BRACKET	1514	8.00
END GUARD RAIL PANEL FOR 5"W THRU FRAME	1515	12.58
GUARD RAIL GATE ADJ. 36" - 54" W/2 CLAMPS	1518	23.00
GUARD RAIL GATE 30" W/2 CLAMPS	1519	13.50
GUARD RAIL FRAME END W/SPRING LOCK 5"W	1570	36.00
GUARD RAIL GATE PANEL END W/SPRING LOCK 5"W	1572	40.00
GUARD RAIL LINE POST 1.89" – MALE	1582	8.75
GUARD RAIL CORNER POST 1.89" – MALE	1583	9.00

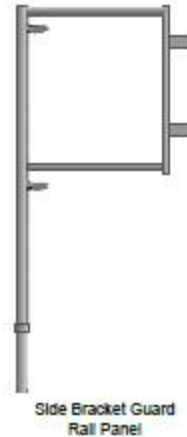

GUARD RAILS & GATES

GUARD RAILS

DESCRIPTION	PART NO.	WT/LBS
GUARD RAIL 2'	1522	1.50
GUARD RAIL 3'	1523	2.00
GUARD RAIL 4'	1524	2.80
GUARD RAIL 5'	1525	4.00
GUARD RAIL 6'	7050	4.60
GUARD RAIL 7'	1527	5.30
GUARD RAIL 10'	1530	11.00
GUARD RAIL 30"	1529	1.80
GUARD RAIL 42"	1542	2.63



GUARD RAIL CLAMPS & ACCESSORIES

DESCRIPTION	PART NO.	WT/LBS
CLAMP W/QUICK LOCK	1503	2.50
GUARD RAIL POST POCKET - STAGE	1539	4.50
PERIMETER GUARD RAIL POST	1905	20.00





Perimeter Guard
Rail Post

ACCESS, CONNECTORS & ACCESSORIES

ACCESS STAIR UNITS

DESCRIPTION	PART NO.	WT/LBS
ACCESS STAIR UNIT 5'H	1575	64.00
ACCESS STAIR OUTSIDE RAIL 5'	1549	29.00
ACCESS STAIR INSIDE RAIL 5'	1548	16.00
ACCESS STAIR UNIT 6'4"H	1576	74.00
ACCESS STAIR OUTSIDE RAIL 6'	1560	30.00
ACCESS STAIR INSIDE RAIL 6'	1555	18.50
ACCESS STAIR BRACE 5'	1565	10.30
INTERNAL GUARD RAIL SUPPORT 7'L	1561	26.61
EXTERNAL ACCESS SUPPORT 7'L	1563	26.61
EXTERNAL ACCESS SUPPORT 10'L	1564	30.00

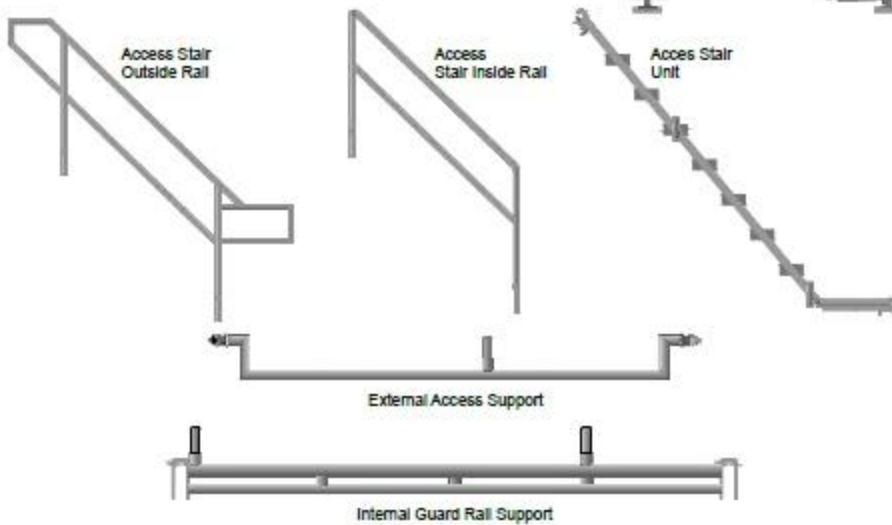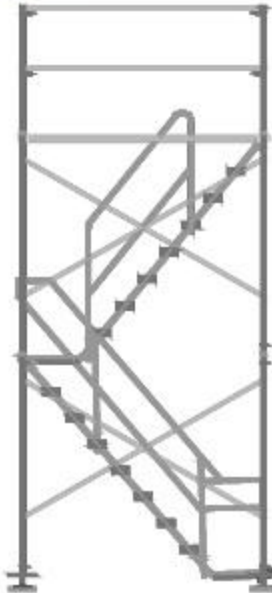

ACCESS, CONNECTORS & ACCESSORIES

LOCKING DEVICES/CONNECTORS

DESCRIPTION	PART NO.	WT/LBS
SPRING CLIP	1421	0.06
GRAVITY/TOGGLE PIN	1212	0.10



COUPLING PINS

DESCRIPTION	PART NO.	WT/LBS
COUPLING PIN	1210	1.30
COMBINATION PIN 1.89" - 1.90"	6001	1.50



HORIZONTAL/DIAGONAL BRACES

DESCRIPTION	PART NO.	WT/LBS
HORIZ/DIAG BRACE 5' X 7'	1127	16.70
HORIZ/DIAG BRACE 5' X 10'	1120	21.00



ACCESS, CONNECTORS & ACCESSORIES

SHORE HEADS

DESCRIPTION	PART NO.	WT/LBS
U-HEAD 4" X 8"	1328	5.5
U-HEAD 8" X 8"	4585	12.00




WARNING: DO NOT USE SHORE HEADS WITH LEVELING JACKS FOR HEAVYDUTY SHORING APPLICATIONS.

EXTENSION LEGS W/COUPLING PINS

DESCRIPTION	PART NO.	WT/LBS
EXTENSION LEG 18"	1618	3.00
EXTENSION LEG 24"	1612	4.00



NOTE: FOR USE WITH FRAME SCAFFOLDING ON STAIRS/UNEVEN SURFACES.

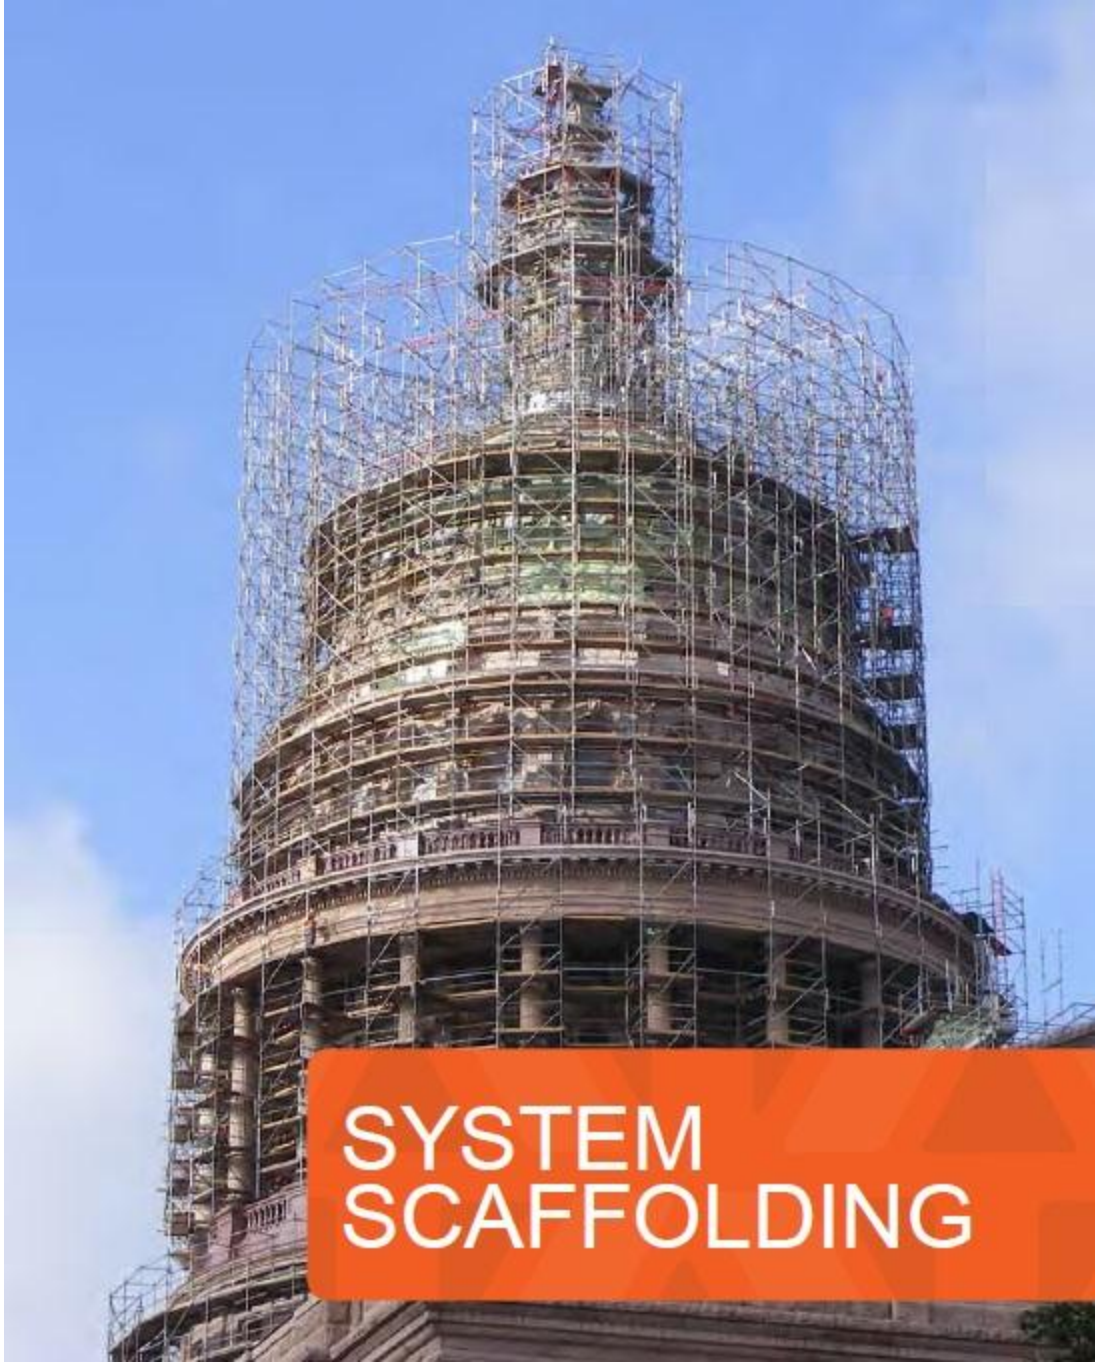


SYSTEM SCAFFOLDING

BLADELOCK MODULAR SYSTEM

VERTICAL STANDARDS

DESCRIPTION	PART NO.	WT/LBS
VERTICAL 1 CUP 1' - 7 11/16" W/CP	6501	9.00
VERTICAL 2 CUP 3' - 3 3/8" W/CP	6502	13.03
VERTICAL 3 CUP 4' - 11 1/16" W/CP	6503	18.30
VERTICAL 4 CUP 6' - 6 3/4" W/CP	6504	25.10
VERTICAL 5 CUP 8' - 2 7/16" W/CP	6505	30.20
VERTICAL 6 CUP 9' - 10 1/8" W/CP	6506	36.50
2 CUP INTERMEDIATE	6008	20.00
CLAMP SPIGOT ADAPTER	6057	2.00
STAGE HEAD	6010	4.75

NOTE: ALL VERTICAL STANDARDS ARE 10 GA.

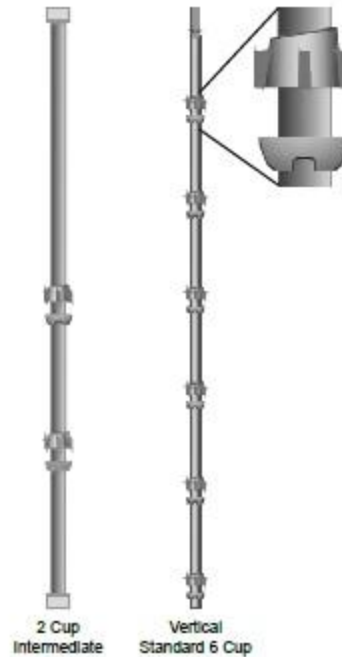

HORIZONTAL LEDGERS & BEARERS

DESCRIPTION	PART NO.	WT/LBS
BEARER 12" - 13 GA	6301	3.50
BEARER 18" - 13 GA	6318	4.25
BEARER 22" - 13 GA	6322	4.30
BEARER 24" - 13 GA	6324	6.83
BEARER 30" - 13 GA	6330	6.00
BEARER 33" - 13 GA	6333	6.50
BEARER 36" - 13 GA	6336	7.96
BEARER 42" - 13 GA	6342	9.33
BEARER 48" - 13 GA	6348	10.36
BEARER 54" - 13 GA	6354	12.00
BEARER 60" - 13 GA	6360	13.10
LEDGER 6' - 13 GA	6306	15.40
LEDGER 7' - 13 GA	6307	18.00
LEDGER 8' - 13 GA	6308	21.00
LEDGER 9' - 13 GA	6309	23.00
LEDGER 10' - 13 GA	6310	25.80



NOTE: BEARERS ARE USED TO SUPPORT SCAFFOLD BOARDS OR STEEL GRATING. LEDGERS ARE NON-LOAD BEARING.

BLADELOCK MODULAR SYSTEM

TRUSS BEARERS

DESCRIPTION	PART NO.	WT/LBS
TRUSS BEARER 5'	6395	18.10
TRUSS BEARER 6'	6396	28.90
TRUSS BEARER 7'	6397	31.00
TRUSS BEARER 8'	6398	38.60
TRUSS BEARER 9'	6391	50.00
TRUSS BEARER 10'	6390	50.00
TRUSS BEARER 12'	6392	60.76
DOUBLE TRUSS BEARER 14'	6394	80.00
DOUBLE TRUSS BEARER 16'	6399	121.84
DOUBLE TRUSS BEARER 18'	6388	137.00
DOUBLE TRUSS BEARER 25'	6404	180.00
DOUBLE TRUSS BEARER 28'	6403	200.00



BOARD BRACKETS

DESCRIPTION	PART NO.	WT/LBS
1 BOARD BRACKET	6051	3.50
2 BOARD BRACKET	6052	15.00
3 BOARD BRACKET	6053	18.10
VERTICAL EXTENSION ADAPTER	6054	4.90
CANTILEVER FRAME 30"	6030	41.00
CANTILEVER FRAME 36"	6036	42.50
CANTILEVER FRAME 42"	6042	44.50
CANTILEVER FRAME 48"	6048	46.50

NOTE: VERTICAL EXTENSION ADAPTER MUST BE USED WITH BOARD BRACKET & CANTILEVER FRAME.




RING MODULAR SYSTEM

VERTICAL STANDARD

DESCRIPTION	PART NO.	WT/LBS
VERTICAL 1 RING 1' - 7 1/2" W/CP	6533	6.72
VERTICAL 2 RING 3' - 3 3/8" W/CP	6507	12.05
VERTICAL 3 RING 4' - 11 1/16" W/CP	6511	17.39
VERTICAL 4 RING 6' - 6 3/4" W/CP	6508	23.36
VERTICAL 5 RING 8' - 2 7/16" W/CP	6510	26.00
VERTICAL 6 RING 9' - 10 1/8" W/CP	6509	33.73
INTERMEDIATE 2 RING	6573	17.00
SPIGOT ADAPTER	6055	2.00
STAGE HEAD DECK ADAPTER	6554	5.50
BASE COLLAR 9"	6534	4.18
BASE COLLAR 17 1/2"	6555	6.06

NOTE: ALL VERTICAL STANDARDS ARE 10 GA.

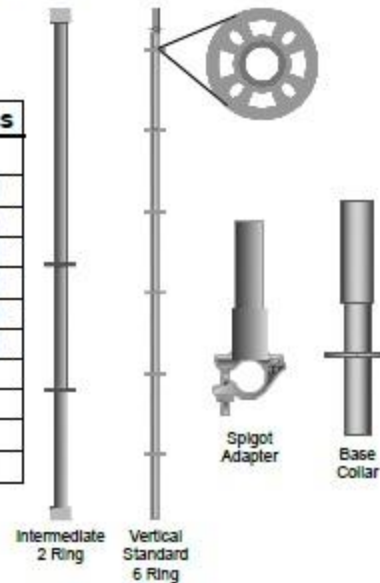

HORIZONTAL LEDGERS & BEARERS

DESCRIPTION	PART NO.	WT/LBS
BEARER 12" - 13 GA	6576	4.65
BEARER 18" - 13 GA	6526	4.25
BEARER 22" - 13 GA	6512	4.30
BEARER 24" - 13 GA	6525	7.64
BEARER 30" - 13 GA	6513	6.00
BEARER 36" - 13 GA	6524	11.92
BEARER 42" - 13 GA	6530	11.44
BEARER 48" - 13 GA	6523	12.72
BEARER 60" - 13 GA	6522	15.23
LEDGER 6' - 13 GA	6521	18.74
LEDGER 7' - 13 GA	6520	20.28
LEDGER 8' - 13 GA	6519	22.86
LEDGER 9' - 13 GA	6518	25.40
LEDGER 10' - 13 GA	6517	27.95
TWO BOARD BRACKET LEDGER 22"	6574	5.96
THREE BOARD BRACKET LEDGER 33"	6575	7.50


NOTE: BEARERS ARE USED TO SUPPORT SCAFFOLD BOARDS OR STEEL GRATING. LEDGERS ARE NON-LOAD BEARING.



RING MODULAR SYSTEM


TRUSS BEARERS

DESCRIPTION	PART NO.	WT/LBS
TRUSS BEARER 5'	6541	18.10
TRUSS BEARER 6'	6540	28.90
TRUSS BEARER 7'	6537	31.00
TRUSS BEARER 8'	6538	38.60
TRUSS BEARER 9'	6550	41.50
TRUSS BEARER 10'	6539	55.90
DOUBLE TRUSS BEARER 12'	6581	60.76
DOUBLE TRUSS BEARER 14'	6582	113.00
DOUBLE TRUSS BEARER 16'	6583	121.84
DOUBLE TRUSS BEARER 18'	6588	137.00
DOUBLE TRUSS BEARER 21'	6584	160.00
DOUBLE TRUSS BEARER 25'	6585	180.00
DOUBLE TRUSS BEARER 28'	6587	200.00

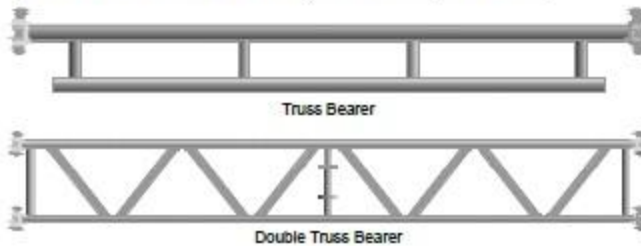

BOARD BRACKETS

DESCRIPTION	PART NO.	WT/LBS
ONE BOARD BRACKET	6542	3.50
TWO BOARD BRACKET	6535	15.00
THREE BOARD BRACKET	6536	18.10
CANTILEVER FRAME 30"	6543	41.00
CANTILEVER FRAME 36"	6544	42.50
CANTILEVER FRAME 42"	6545	44.50
CANTILEVER FRAME 48"	6546	50.00

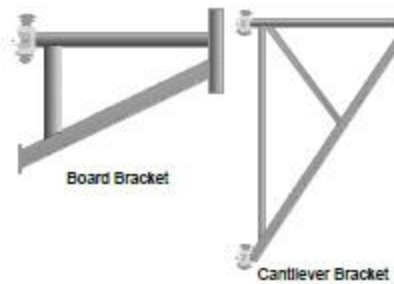

INTERCHANGEABLE ITEMS – SYSTEM SCAFFOLD

VERTICAL DIAGONAL & ACCESSORIES

DESCRIPTION	PART NO.	WT/LBS
VERT/DIAG 3' X 6'6" W/CLAMPS	6636	15.30
VERT/DIAG 4' X 6'6" W/CLAMPS	6648	16.20
VERT/DIAG 5' X 6'6" W/CLAMPS	6625	21.34
VERT/DIAG 7' X 6'6" W/CLAMPS	6627	29.19
VERT/DIAG 8' X 6'6" W/CLAMPS	6628	26.10
VERT/DIAG 10' X 6'6" W/CLAMPS	6620	38.50
COMBINATION PIN 1.89" - 1.9"	6001	1.50
CLAMP WITH CUPLOCK BLADE	6056	4.00
CLAMP WITH RING WEDGE	6578	4.00



BASE UNITS

DESCRIPTION	PART NO.	WT/LBS
BASE PLATE - MALE	6200	4.00
SWIVEL BASE PLATE - FEMALE	6201	6.44
LEVELING JACK WITH BASE	5518	13.00
LEVELING JACK	4505	12.50



Leveling Jack
with Base




Leveling Jack




Swivel Base Plate

INTERCHANGEABLE ITEMS – SYSTEM SCAFFOLD

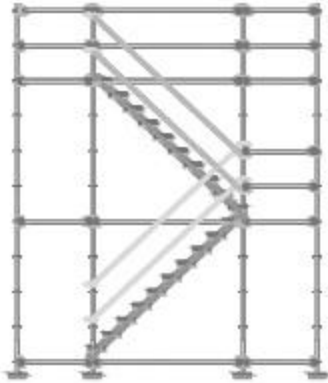

ACCESS STAIR UNITS

DESCRIPTION	PART NO.	WT/LBS
LEFT STAIR STRINGER 10 STEP 7' BAY	6071	41.50
RIGHT STAIR STRINGER 10 STEP 7' BAY	6072	41.50
LEFT STAIR STRINGER 11 STEP 8' BAY	6081	45.00
RIGHT STAIR STRINGER 11 STEP 8' BAY	6082	45.00
STAIR TREAD 30"	5718	10.67
STAIR TREAD 36"	5719	12.67
STAIR TREAD 44"	5720	15.00




LADDERS & CAGE HOOPS

DESCRIPTION	PART NO.	WT/LBS
LADDER CAGE FULL HOOP RND	6596	18.00
LADDER CAGE HOOP 3/4 RND	6597	18.00
LADDER STEEL TUBULAR 3'	6593	17.50
LADDER STEEL TUBULAR 5'	6595	24.50
LADDER STEEL TUBULAR 10'	6590	47.00
LADDER STEEL TUBULAR BRACKET	6599	7.50
GATE STOP ADAPTER - RING	6580	8.75

STEEL TUBES, CLAMPS & ACCESSORIES

STEEL TUBES WITH FITTINGS

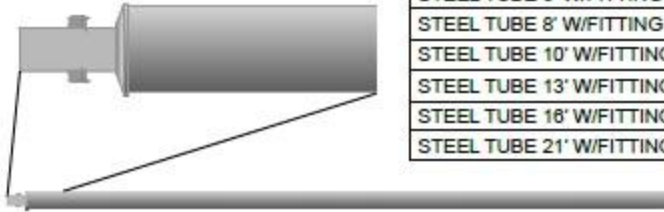

DESCRIPTION	PART NO.	WT/LBS
STEEL TUBE 2' W/FITTING	3802	7.20
STEEL TUBE 3' W/FITTING	3803	9.30
STEEL TUBE 4' W/FITTING	3804	9.80
STEEL TUBE 6' W/FITTING	3806	13.00
STEEL TUBE 8' W/FITTING	3808	17.00
STEEL TUBE 10' W/FITTING	3810	21.00
STEEL TUBE 13' W/FITTING	3813	26.00
STEEL TUBE 16' W/FITTING	3816	31.00
STEEL TUBE 21' W/FITTING	3819	62.79

STEEL TUBES - PLAIN END

DESCRIPTION	PART NO.	WT/LBS
STEEL TUBE 2' PLAIN END	3852	4.20
STEEL TUBE 3' PLAIN END	3853	6.30
STEEL TUBE 4' PLAIN END	3854	8.00
STEEL TUBE 6' PLAIN END	3856	12.20
STEEL TUBE 8' PLAIN END	3858	16.40
STEEL TUBE 10' PLAIN END	3860	20.50
STEEL TUBE 13' PLAIN END	3863	26.80
STEEL TUBE 16' PLAIN END	3866	33.00
STEEL TUBE 21' PLAIN END	3871	43.40

STEEL TUBES, CLAMPS & ACCESSORIES

CLAMPS

DESCRIPTION	PART NO.	WT/LBS
DUAL PURPOSE SWIVEL CLAMP	3222	4.10
DUAL PURPOSE RIGHT ANGLE CLAMP	3221	3.60
SWIVEL JOIST CLAMP	3203	4.00
RIGID RIGHT ANGLE JOIST CLAMP	3235	3.50



Dual Purpose Right Angle Clamp



Joist Clamp

BASE PLATES

DESCRIPTION	PART NO.	WT/LBS
SWIVEL BASE PLATE	3262	7.00
BASE PLATE	3261	3.80



Base Plate

MULTIPURPOSE SCAFFOLDING



DESCRIPTION	PART NO.
MULTI-PURPOSE GUARD RAIL SYS	201897
MULTI-PURPOSE BASE UNIT	201898

FEATURES


- 29" wide frames - platform adjustment in 2" increments.
- Platform deck is 29" wide x 8' long.
- One of the easiest units in the industry to use.
- Rolls through a standard doorway.
- Can stack units for increased work heights.
- Use on level surfaces or stairs.
- Heavy duty 5/8" plywood deck with steel edge banding.
- 2 pieces make a complete guard rail system including the toe board.
- Powder coated finish.
- Maximum load capacity: 1000 lbs evenly distributed.

APPLICATIONS

- Drywall
- Painting
- Acoustical
- Electrical
- HVAC
- Installations
- Maintenance
- Window
- Indoor & Outdoor Applications

OTHER AVAILABLE COMPONENTS INCLUDE

- 6' Guard Rail Set (2 Pcs.)
- Wide Outrigger Pkg. (4 Pcs.)
- Narrow Outrigger Pkg. (4 Pcs.)
- 65" Ladder Frame
- 39" Ladder Frame
- 6' Plywood Platform
- 8' Truss Brace
- 5" Caster
- Double Unit w/Guard Rail & Outriggers

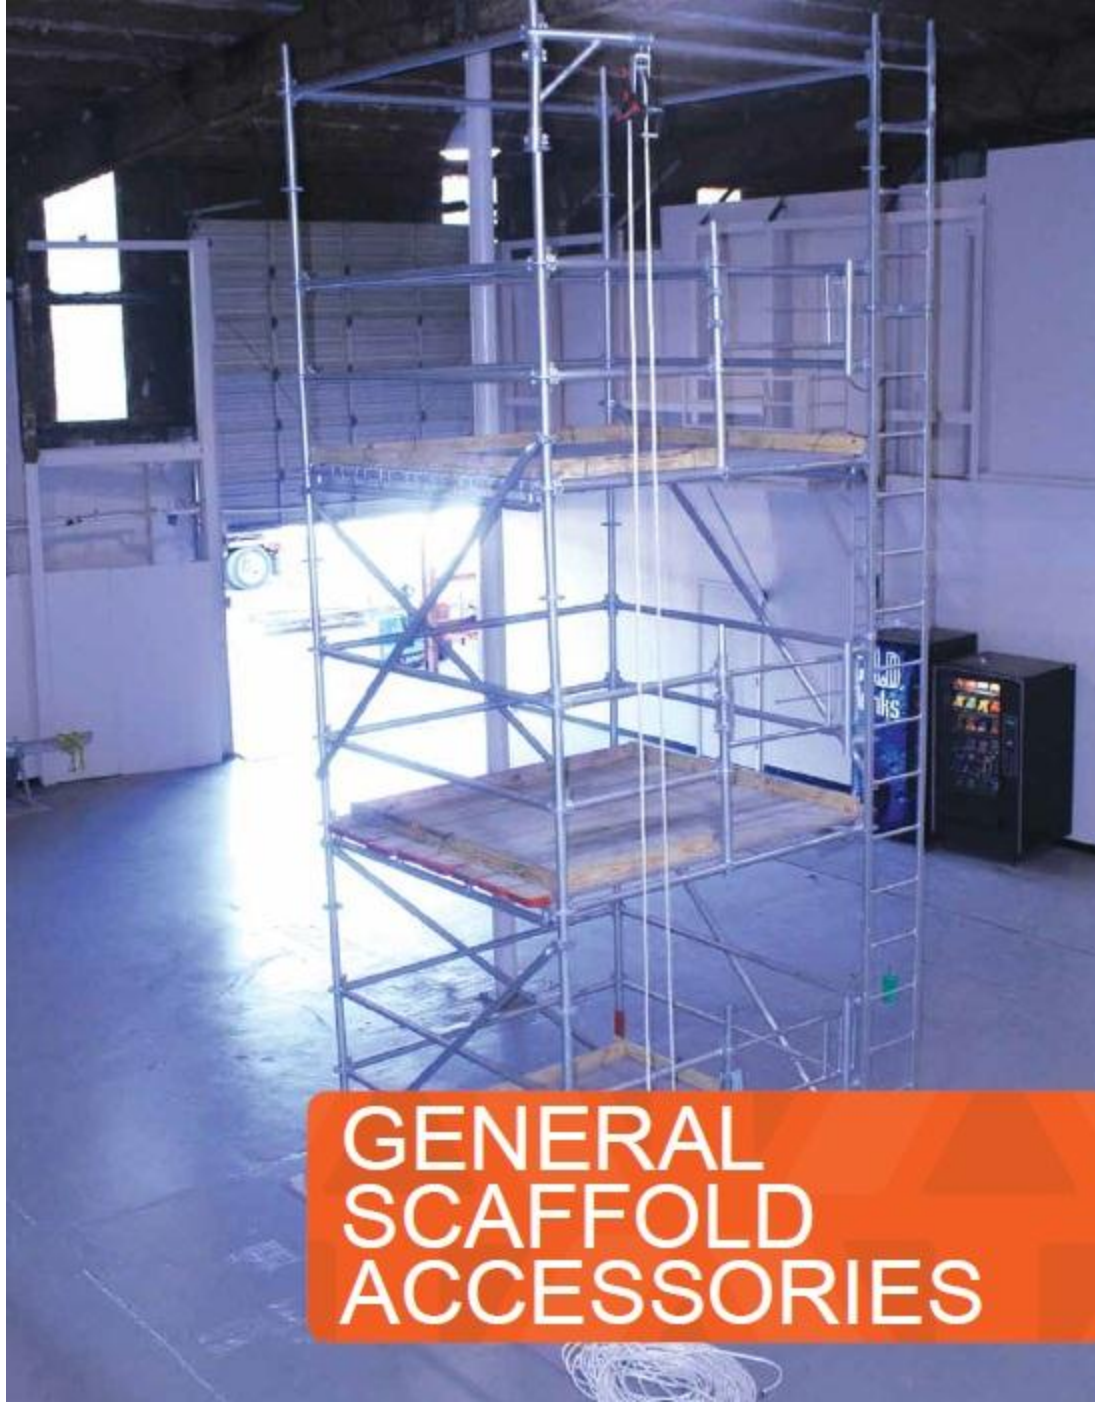

**GENERAL
SCAFFOLD
ACCESSORIES**

ALUMINUM SCAFFOLD BOARDS

DESCRIPTION	PART NO.	WT/LBS
TUFF BOARD 7'L X 19 1/4"W	2707	30.00
TUFF BOARD 10'L X 19 1/4"W	2710	41.00



STEEL GRATING

DESCRIPTION	FLAT HOOK PART NO.	RAISED HOOK PART NO.	WT/LBS
GRATING 30" X 9"	5700	N/A	16.00
GRATING 42" X 9"	5702	5542	20.00
GRATING 2' X 9"	5722	5502	12.00
GRATING 3' X 9"	5701	5500	18.00
GRATING 4' X 9"	5703	5504	22.00
GRATING 5' X 9"	5704	5505	26.03
GRATING 6' X 9"	5705	5506	30.04
GRATING 7' X 9"	5706	5507	34.05
GRATING 8' X 9"	5707	5508	38.06
GRATING 9' X 9"	5709	N/A	42.00
GRATING 10' X 9"	5708	5510	46.09



WOOD BOARDS


DESCRIPTION	PART NO.	WT/LBS
SCAFFOLD BOARD 2" X 10" X 4'L	2202	16.00
SCAFFOLD BOARD 2" X 10" X 6'L	2208	24.00
SCAFFOLD BOARD 2" X 10" X 8'L	2208	32.00
SCAFFOLD BOARD 2" X 10" X 10'L	2210	40.00
SCAFFOLD BOARD 2" X 10" X 12'L - PINLOCK	2230	48.00
SCAFFOLD BOARD 2" X 10" X 16'L	2218	62.00

NOTE: ALL SCAFFOLD BOARDS ARE GRADE DI-65, MEETING OSHA REQUIREMENTS.



STEEL ACCESS LADDERS & GATES

DESCRIPTION	PART NO.	WT/LBS
STEEL FLAT LADDER 3'	1553	9.50
STEEL FLAT LADDER 4'	1554	12.25
STEEL FLAT LADDER 6'	1556	18.00
STEEL LADDER BRACKET	1550	6.50
SPRING GATE STOP ADAPTER - BL	6070	3.00
GUARD RAIL GATE ADJ 36" - 54"	1518	23.00

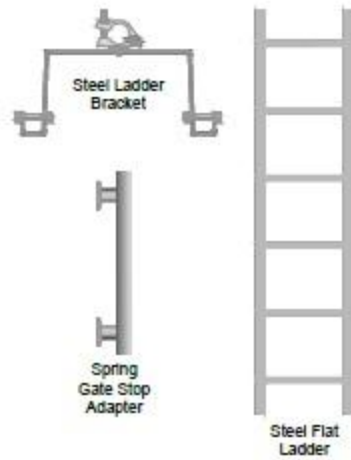

SECURE PULLEYS & BRACKETS

DESCRIPTION	PART NO.	WT/LBS
PULLEY	6101	11 LBS
MINIMUM LOAD - 20 LBS		
MAXIMUM LOAD - 110 LBS		
MAXIMUM HEIGHT - 130 FT		
ROPE DIAMETER (INCHES): 5/8" - 3/4"		
SUGGESTED ROPE: 5/8" POLY		



DESCRIPTION	PART NO.	WT/LBS
PULLEY BRACKET - FRAME	6102	17.00
PULLEY BRACKET - SYSTEM	6103	17.00



CASTERS

DESCRIPTION	PART NO.	WT/LBS
RUBBER WHEEL CASTER 8"	1608	13.80
NEOPRENE WHEEL CASTER 12"	1630	44.00
MALE ADAPTER	1216	6.50
CASTER ADAPTER – BLADELOCK	6713	13.00
CASTER ADAPTER – RING	6556	11.75



Caster Adapter
BladeLock



Caster
Adapter Ring



12" Caster



SUSPENDED SCAFFOLDING

SUPPORT SYSTEM/ROOF RIGGING

DESCRIPTION	PART NO.	WT/LBS
DOLLY – ROLLING	2501	75.00
CASTER 8" NEOPRENE RED 900 LBS	2510	14.00
SCREW JACK 18" – OPTIONAL	5520	13.00
COUNTERWEIGHT BEAM	2503	50.00
LONGHORN ASSEMBLY 40"	2509	17.00
COUNTERWEIGHT 50 LBS	2068	50.00
MAST HEAD FOR 5" X 5" H-BEAM	2035	15.00
ALUM SPLICE TUBE ASSEMBLY 5" X 5" X 2'	2033	15.00
ALUM SPLICE TUBE ASSEMBLY 5" X 5" X 3'	2031	22.00
ALUM SPLICE TUBE ASSEMBLY 5" X 5" X 8'	2037	60.00
ALUM H-BEAM 5" X 5" X 8' FRONT/REAR	2032	52.00
ALUM H-BEAM-MID 5" X 5" X 8'	2034	52.00
STEEL PIN 3/4" X 6"	2499	1.00
SPLICE PLATE ASSY FOR 5" X 5" BEAM	2029	8.00
LONGHORN FLATROOF BEAM – BETCO	2500	60.00
LONGHORN FLATROOF BEAM	2511	10.00
TANK TOP ROLLER	2028	40.00
PIGEON HOLE BRACKET	2802	20.00
PARAPET CLAMP – 6" TO 37" ALUM	2079	58.00
HEADER BEAM CLAMP ADJUSTABLE	2010	20.50
HEADER BEAM 5' – FRAME SCAFFOLD	4906	78.00
HEADER BEAM 5' – SYSTEM SCAFFOLD	4907	75.00
DOWN & UNDER	2009	164.00
BEAM STAND 20" – FRONT	2144	75.00
BEAM STAND 20" – REAR	2145	75.00
ALUM BEAM 10" X 6"; 12 1/2' FRONT/REAR	2014	108.00
ALUM BEAM 10" X 6"; 12 1/2' MIDDLE	2015	108.00
MASTHEAD 10" X 6"	2016	25.00
ALUM SPLICE PLATE ASSEMBLY 10" X 6"	2017	8.00
ALUM BEAM 10" X 6" X 9' FRONT/REAR	2018	77.00
ALUM BEAM 10" X 6" X 9' MIDDLE	2019	77.00
STAND LOW PROFILE – 14" FRONT	2142	65.00
STAND LOW PROFILE – 14" REAR	2143	65.00

ADDITIONAL EQUIPMENT AVAILABLE UPON REQUEST.

NOTE: Systems are complete and ready to rent. Always use tieback cable. Systems listed are the most common, others are available.

For descriptions on special project needs, contact your nearest BETCO representative. Erection and dismantling services are available.



Rolling Dolly System



Pigeon Hole Bracket



Parapet Clamp



Down & Under

ROOF RIGGING ACCESSORIES

DESCRIPTION	PART NO.	WT/LBS
WIRE ROPE 5/16" GALVANIZED	2048	0.25*
FIST GRIP 5/16" CLAMP	2074	0.10
THIMBLE 3/8"	2096	0.05
INSULATED THIMBLE 3/8"	N/A	0.05
SHACKLE SCREW PIN 5/8"	2098	2.00

*PER LINEAR FOOT



Insulated Thimble 3/8"

SUSPENDED SYSTEM PLATFORMS

DESCRIPTION	PART NO.	WT/LBS
FRAME SIDE 1/2 M	2132	6.00
GUARD RAIL 1/2 M	2133	1.00
DECK 1/2 M	2134	7.00
FRAME SIDE 1 M	2101	12.00
GUARD RAIL 1 M	2103	2.00
DECK 1 M	2106	15.00
FRAME SIDE 2 M	2109	23.00
GUARD RAIL 2 M	2115	4.00
DECK 2 M	2116	25.00
FRAME SIDE 3 M	2117	38.00
GUARD RAIL 3 M	2118	5.00
DECK 3 M	2120	38.00
U-FRAME	2123	14.00
POST GUARD RAIL	2150	2.00
QUICK PINS	2153	1.00
STIRRUP – END	2151	28.00
STIRRUP – LOW PROFILE	2148	115.00
STIRRUP – WALK THRU	2156	140.00
STIRRUP – ALUM SINGLE POST	2147	117.00
END GUARD RAIL	2152	10.00
CASTER 8" - PLATFORM	2154	9.00
WALL ROLLER	2155	5.00
WALL ROLLER – ADJUSTABLE	2163	19.00
END WALL ROLLER	2164	5.00



Suspended Platform



One Man Basket



Walk Thru Stirrup



Wall Roller



Adjustable Wall Roller

SUSPENDED SYSTEM PLATFORM ACCESSORIES

DESCRIPTION	PART NO.	WT/LBS
30° ANGLE FIXED CORNER	2157	21.00
45° ANGLE FIXED CORNER	2158	23.00
90° ANGLE FIXED CORNER	2159	64.00
FIBERGLASS BOSUN CHAIR	2054	30.00
ADJUSTABLE MODULAR CORNER	2161	125.00
6' FOLD UP WORK BASKET	2002	115.00
STIRRUP INCLINE	2146	175.00
STIRRUP UNDERHANG	2149	115.00
STIRRUP DOUBLEWIDE	2162	81.25
HINGE SECTION	2135	10.00
PORCH BRACKETS	3199	20.00

ADDITIONAL EQUIPMENT AVAILABLE UPON REQUEST.



Adjustable Modular Corner



Porch Bracket

ELECTRIC & AIR MOTORS

PART NO. DESCRIPTION	2993 TIRAK XA500P	2998 TIRAK XE501P	3004 POWER CLIMBER	3005 POWER CLIMBER	3006 POWER CLIMBER	BISOMAC
CAPACITY	1000	1000	1500	1000	1000	1000/1500
LIFTING SPEED (F.P.M.)	35	35	35	35	35	35
WEIGHT (LBS)	106	106	99	99	99	115
ELECTRICAL MOTOR:						
TYPE KW	N/A	1.1	1.2	1.2	N/A	0.9 kW
VOLTAGE	N/A	110/220	208	208	N/A	208
AMPERAGE	N/A	19.5/9/5	7	7	N/A	20
PHASE	N/A	SINGLE	SINGLE	SINGLE	N/A	SINGLE
AIR MOTOR:						
CONSUMPTION (SFM)	53	N/A	N/A	N/A	53	N/A
WORKING PRESSURE (PSI)	85	N/A	N/A	N/A	85	N/A
WIRE ROPE:						
DIAMETER (IN)	5/16 - 8MM					
BREAKING STRENGTH (LBS) (MIN)	10,000					
CONSTRUCTION	5 X 26 FC GALVANIZED					



Tirak



Power Climber



Bisomac

POWER ACCESSORIES

DESCRIPTION	PART NO.	WT/LBS
POWER BOOSTER - PLUS 10 %	2061	20.00
STEP DOWN TRANSFORMER - 220V/110V	2095	60.00
POWER CABLE 10/3	1022	0.50*
POWER SUPPLY YOKE - 50 FT.	1020	12.00
POWER SOURCE CONNECTOR	2059	2.00

*PER LINEAR FOOT



Power
Cable



Power
Supply
Yoke



Step Down Transformer & Booster

SAFETY EQUIPMENT

DESCRIPTION	5/8 INCH SAFETY ROPE
PART NO.	498600
LENGTH	- 600 FT. SPOOL - 1,200 FT. SPOOL - CUSTOM LENGTHS
CONSTRUCTION	BLENDED TENACITY POLYESTER & POLYPROPYLENE, 3-STRAND MONOFILAMENT, TWISTED
COLOR	WHITE WITH TRACERS
TENSILE STRENGTH	7,500 LBS.
WEIGHT	9.2 LBS./100 FT.
CIRCUMFERENCE	5/8"
MELTING POINT	500° F



DESCRIPTION	PART NO.	WT/LBS
5/8" ROPE GRAB	6111	1.00
HOLD ME LIFELINE ANCHOR	6105	1.00
PROTECT ME DEVICE	6106	0.50
LANYARD 3' SHOCK ABSORBER TYPE	6107	N/A
LANYARD 6' SHOCK ABSORBER TYPE	6108	N/A
FULL BODY HARNESS	6104	N/A
RETRACTABLE LIFE LINE	N/A	N/A



5/8" Rope Grab

Hold Me Lifeline Anchor

Protect Me Device




Lanyard Shock Absorber Type



Full Body Harness



Retractable Life Line

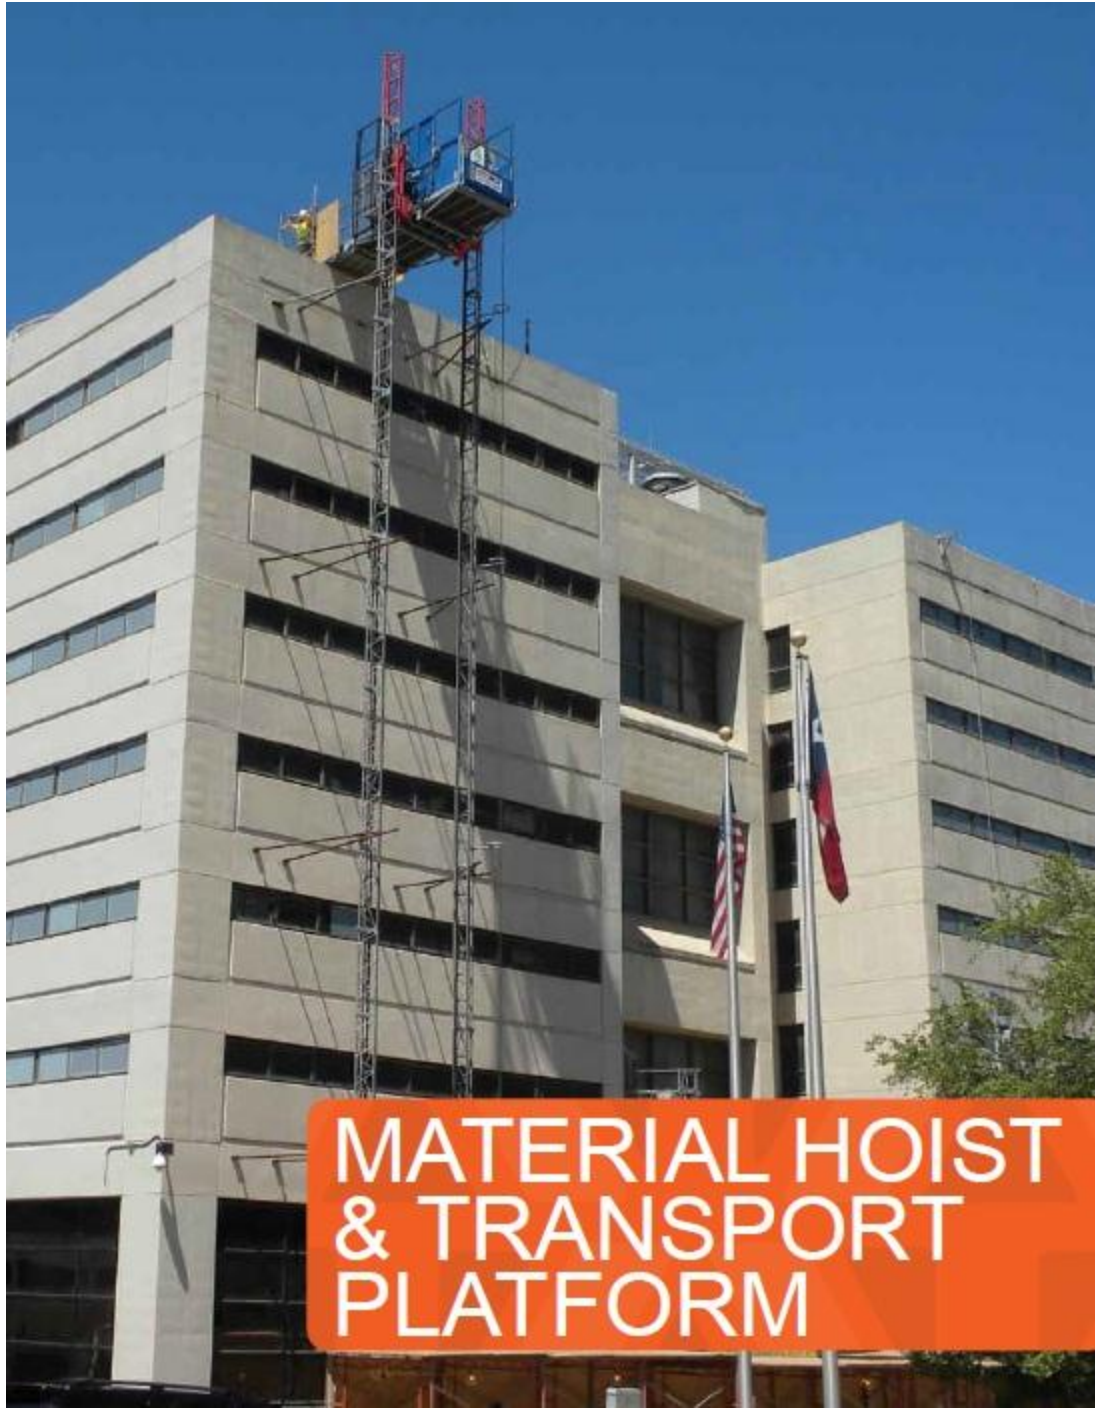

**MATERIAL HOIST
& TRANSPORT
PLATFORM**

Portable wire rope hoists install easily on existing scaffold systems, work platforms, I-Beams and rooftop mounting options. They give the ability to control work flow, schedule and budget with the most efficient and safe material delivery to any work level. Perfect for use as a masonry hoist, glazing hoist, stucco hoist or monorail hoist.

PORTABLE WIRE ROPE HOISTS

BRAND	BETAMAX				TRACTEL	
DESCRIPTION	GEMINI PLUS	GEMINI PLUS	LEO XXL	LEO XXL	MINI FOR TR-50	MINI FOR TR-50
SET-UP	SINGLE LINE	DOUBLE LINE	SINGLE LINE	DOUBLE LINE	SINGLE LINE	DOUBLE LINE
LIFTING CAPACITY	600 LBS	1,200 LBS	1,000 LBS	2,000 LBS	1,000 LBS	2,000 LBS
LIFT SPEED	80 FPM	40 FPM	80 FPM	40 FPM	23 FPM	11.5 FPM
LIFTING HEIGHT	220 FT	110 FT	400 FT	200 FT	UNLIMITED	UNLIMITED
UNIT WEIGHT	150 LBS	150 LBS	175 LBS	175 LBS	71 LBS	71 LBS
CABLE TYPE	DRUM	DRUM	DRUM	DRUM	SHEAVE	SHEAVE
CONTROLLER TYPE	DUAL CONTROL – OPTIONAL EXTENDABLE PENDANT – STANDARD WIRELESS CONTROL - OPTIONAL				EXTENDABLE PENDANT – STANDARD	
A/C POWER	110V, 1PH 220V, 1PH	120V, 20 AMP, 1PH 220V, 12 AMP, 1PH	220V, 3PH CANNOT BE FIELD CONVERTED	220V, 13 AMP, 3PH CANNOT BE FIELD CONVERTED	220V, 1PH	220V, 1PH
MOUNTING OPTIONS	FIXED I-BEAM I-BEAM TROLLEY SCAFF TRAC TRESTLE MONORAIL				HOOK MOUNTED FIXED I-BEAM I-BEAM TROLLEY	



Gemini Plus



Basket with Spreader Bar

Product & Safety Features:

- Water tight connectors
- Easy cable replacement
- Failsafe brake holds the load securely when not lifting or lowering
- Non-rotating cable helps keep loads from spinning
- Upper-Limit Switch
Assembly stops the hoist instantly when activated
- Sturdy Electrical Controller
equipped with thermal overload sensing device

ACCESSORIES

DESCRIPTION	PART NO.	WT/LBS
SPREADER BAR	1495	15.00
BASKET W/SPREADER BAR – 400 LBS	1494	125.00
BASKET W/SPREADER BAR – 800 LBS	1449	148.00
SCAFFOLD FRAME FORK	N/A	25.00
I-BEAM SUSPENSION BRACKETS	1459	15.00

RACK & PINION MATERIAL HOISTS & TRANSPORT PLATFORMS

DESCRIPTION	MAX CLIMBER 2000 MB	MAX CLIMBER 3300	ALIMAK HEK TPM 1300	HEK DUAL T TRANSPORT
PAYLOAD	2,000 LBS	3,300 LBS	3,000 LBS	3,000 LBS
HEIGHT – MAXIMUM	500 FT	450 FT	200 M / 656 FT	120 M / 393 FT
SPEED	80 FPM	40 FPM	12/24 MPM	12/24 MPM
POWER	208V	480V	400V	240V
CONTROL TYPE	GROUND	DUAL	DUAL	DUAL
PLATFORM WIDTH*	OPTION	OPTION	OPTION	OPTION

*ADDITIONAL PLATFORM SIZES AVAILABLE UPON REQUEST.

Product & Safety Features:

- Each 5 ft. galvanized mast section is easily installed with four bolts
- Emergency upper and lower limit devices and separate emergency over speed brake
- Floor stops allow system to stop at pre-set levels
- Ground personnel safety alert – material hoist automatically stops 10 ft. above ground
- Installation platform for installing and anchoring mast
- Mounting clamps available for attaching to scaffolding or anchoring to building
- Removable controller for easier service
- Screw jacks for easy and fast leveling of base unit
- Optional roof enclosure available
- Optional phase converter allows system to operate on 230V/single phase



Material Hoist






SHORING

POST SHORES

DESCRIPTION	PART NO.	WT/LBS
POST SHORE 6'6" – 11' FLATHEAD GALV	4601	40.50
POST SHORE 6' – 11' W/14" U HEAD	4605	51.00
POST SHORE 6' – 11' W/8" U HEAD	4615	47.50
POST SHORE 8' – 13' W/14" U HEAD	4625	56.00
POST SHORE 8' – 13' W/8" U HEAD	4635	52.25
POST SHORE 10'6" – 15' W/8" U HEAD	4655	60.50
POST SHORE 10'6" – 15'6" FLATHEAD GALV	4675	52.00
POST SHORE 10' – 18'	4600	80.00

NOTE: WEIGHT CAPACITY DECREASES AS HEIGHT INCREASES.
CONSULT WITH BETCO REPRESENTATIVE FOR CAPACITIES.



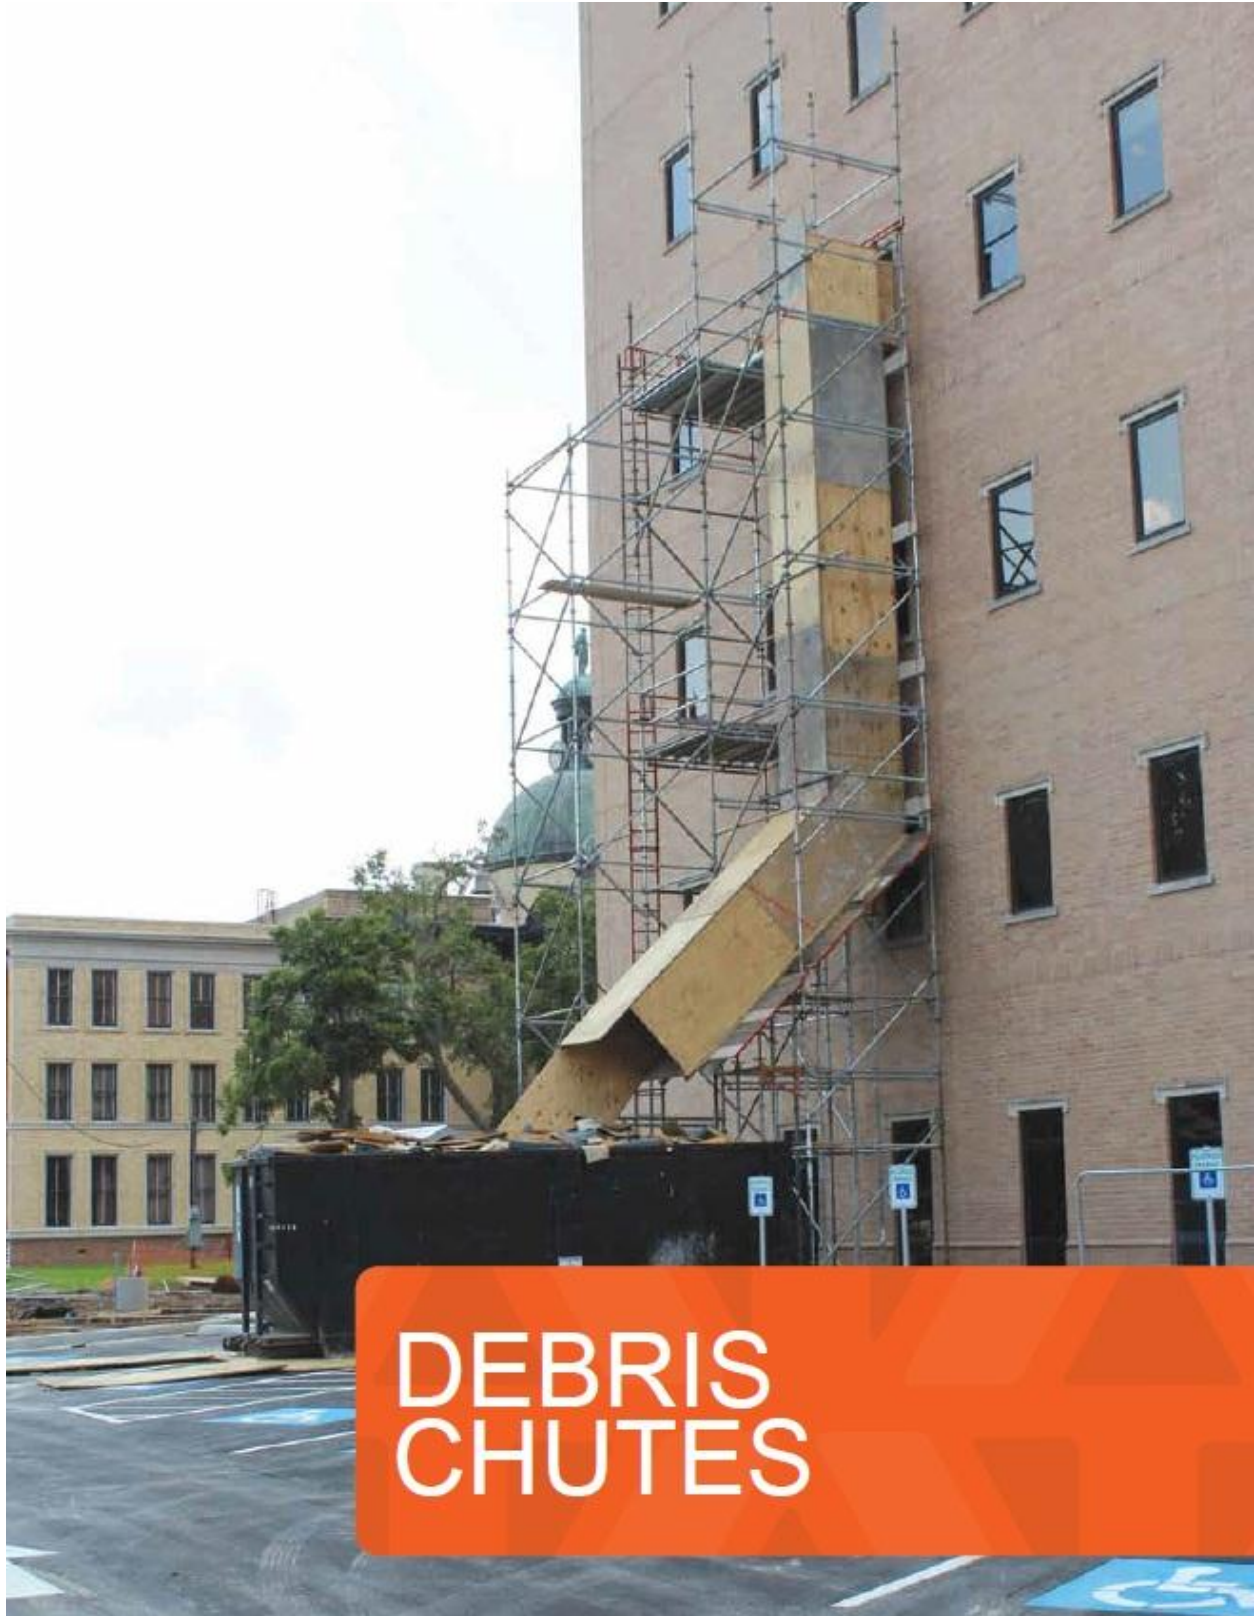

DEBRIS CHUTES

PLASTIC DEBRIS CHUTES

DESCRIPTION	PART NO.	WT/LBS
CHUTE SECTION	9870	32.00
HOPPER INTAKE	9871	58.00
HOPPER INTERMEDIATE	9872	61.00
BAR HOPPER WITH FLAP	9873	3.00
BAR HOPPER RETAINER	9874	1.00
LINER PROTECTIVE	9875	16.00
FRAME BASIC SUPPORT	9876	62.00
OUTRIGGER PARAPET	9877	92.00
OUTRIGGER FLAT ROOF	9879	0.00
BAR PICKING FOR CRANE	9880	10.00
CHAIN PICKING	9881	5.00
WINCH	9882	84.00

Product Features:

- Larger, 32" inside diameter
- Thicker, more resilient HDPE
- Safe, easy, and quick to install
- Extremely flexible system
- Hardware is galvanized
- Intermediate intakes can be easily placed anywhere along chute
- Sections are telescopic for ease of storage and transport

Complete system for your every need:

Window/parapet outrigger
Scaffold outrigger
Flat roof outrigger

Can be used for:

Roofing
Renovation
New Construction



WOOD DEBRIS CHUTES

- Custom designed – built for specific site requirements to accommodate any number of debris access points.
- Chute angle and length at the bottom built to reach dumpster location.
- Heavy-duty – built to handle more abrasive materials.
- Built to withstand extreme weather conditions and the rigors of tough daily use.
- Will accommodate larger materials than manufactured systems.
- Longer materials won't have to be cut into small pieces, saving time and labor.

SAFETY GUIDELINES

Safety is everyone's responsibility. BETCO Scaffolds equipment is designed with the user in mind. Follow these safety guidelines in order to help prevent injury and to reduce unnecessary risk.

1 **COMPETENT PERSON.** Scaffold must be erected, used, moved, and disassembled only under the direction of a Competent Person. The customer is responsible for following any and all applicable federal and state occupational safety and health laws, rules, regulations and ordinances in addition to applicable city, county or local codes and specific rules with regard to Competent Person and inspection requirements for scaffolds.

2 **MODIFICATION.** Any modification or relocation of scaffolding equipment and its components by the customer, contractor or any subcontractor using the scaffold is done solely at the customer's risk and should be in compliance with and according to any and all federal and/or state occupational safety and health laws, rules, and purposes for which it was designed.

3 **TRAINING.** The customer is responsible for providing any and all required scaffolding training for its employees and any other users of scaffolding equipment, other than the employees of BETCO Scaffolds.

4 **HAZARDOUS MATERIALS.** Please notify BETCO Scaffolds of the potential for exposure of either BETCO Scaffolds employees or BETCO Scaffolds equipment to any hazardous materials including, but not limited to, asbestos, lead, arsenic, chemicals, and flammable materials. BETCO Scaffolds and/or customer may be required to perform industrial hygiene monitoring to measure potential exposure to such materials.

5 **CONFINED SPACE.** Please notify BETCO Scaffolds if any BETCO Scaffolds employees will be working in a confined space and inform BETCO Scaffolds whether the confined space is permit-required. According to federal and state occupational safety and health laws, the customer is responsible for providing any and all required confined space training for its employees and any other users of scaffolding equipment in the confined space, other than the employees of BETCO Scaffolds.

6 **LOCK-OUT/TAG-OUT.** According to federal and state occupational safety and health laws, the customer is responsible for ensuring that all mechanical equipment, electrical circuits, or vessels containing chemicals or pressurized fluids which are located in the immediate vicinity of the work areas are de-energized or rendered inoperative prior to work, and that proper tags and/or locks are attached to all points where such equipment can be energized.

7 **SPECIAL EQUIPMENT.** Please notify BETCO Scaffolds if any specialized equipment including, but not limited to, special tools, lighting, or protective equipment is required for this project prior to BETCO Scaffolds commencement of work on the project.

8 **ACCIDENT NOTIFICATION.** Please notify BETCO Scaffolds immediately of any accident involving the equipment and/or any accident causing injury, death or property damage that is related to or is alleged to be related to and/or caused by the equipment in any way.